


P202G
TR-202

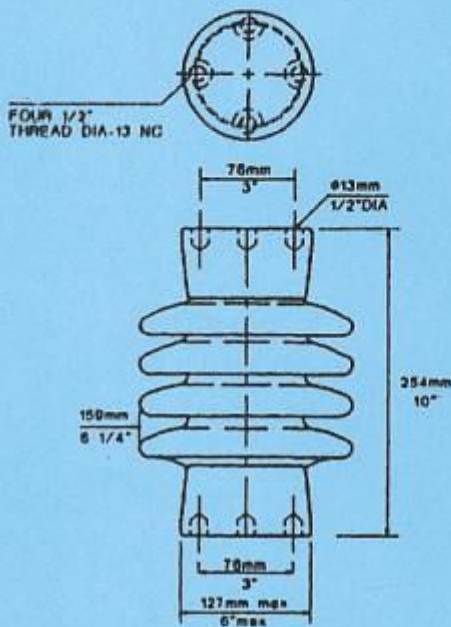

P205G
TR-205

Specification - ANSI C29.9

Catalog Number	P202G	P205G
----------------	-------	-------

Dimensions (in.)

Leakage Distance	10-1/2	15-1/2
Dry Arcing Distance	6	7-1/4

Mechanical Values (lbs.)

Cantilever Strength	2,000	2,000
---------------------	-------	-------

Electrical Values (kV)

Usual Line Voltage	7.5	15
Low Frequency Dry Flashover	60	85
Low Frequency Wet Flashover	40	55
Impulse Flashover, Positive	105	125
Impulse Flashover, Negative	120	200

Radio Influence Voltage Data

Test Voltage, RMS to Ground (kV)	5	10
Maximum RIV at 1000 kHz (µV)	50	50

Packing & Shipping Data

Net Weight Each (lbs.)	11.2	15.0
Packed Weight Each (lbs.)	14.3	18.4
Standard Package Quantity	4	4

ANSI - 70 Gray Glaze is Standard.



POWERLINE HARDWARE

245, North Lane Avenue, Jacksonville,
Florida 32254

Phone : 904-695-9880

Fax : 904-695-9717

Website : www.powerlinehardware.com