


Aluminum Splices



- PLH automatic splices make installation and restoration an ease.
- Dual rated splices reduce inventory on service vehicles and allow quick and easy installation.
- Our single conductor splices also allow easy and secure alignment for fast recovery and power restoration.
- Standard color funnel guides make conductor and splice identification easy to identify in the worst conditions.

Cat. No.	Conductor Range			Decimal Range	Color Code	Color Code	Overall Length (inches)
	ACSR	AAAC	AAC				
PLH-4	#4 (6/1) (7/1)	#4	#4	0.232-0.260	4-Orange		11.5
PLH-42	#4,#2 (6/1) (7/1)	#4-#2	#4-#2	0.232-0.332	4-Orange	2-Red	13.75
PLH-10	1/0 (6/1)	1/0 (6/1)	1/0 (6/1)	0.368-0.410	1/0-Yellow		16.25
PLH-1020	1/0 (6/1),2/0 (7/1)	1/0-2/0	1/0-2/0	0.368-0.461	1/0-Yellow	2/0-Grey	16.25
PLH-2/0	2/0 (7/1)	2/0	2/0	0.414-0.461	2/0-Grey		16.25
PLH-40	4/0 (6/1)	4/0	4/0	0.475-0.575	4/0-Pink		23.5
PLH-266336	336 (18/1),266 (26/7)312.8	312.8	266-336	0.586-0.684	Green		23.5
PLH-397477	397477 (18/1)	394.5	397-477	0.720-0.858	Blue		23.5

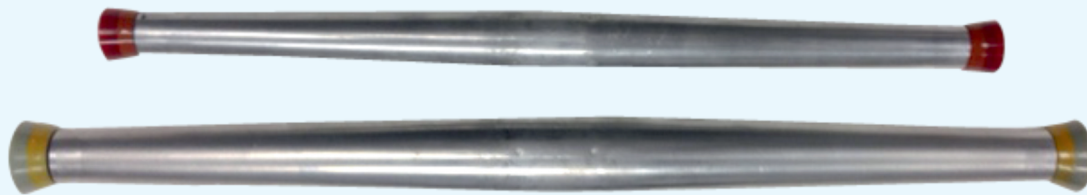