


Double Arming Bolts

Hot Dip Galvanized, Rolled Threads

Fasteners

Min. Tensile Strength	
5/8 Inch	12,400 lbs
3/4 Inch	18,350 lbs
7/8 Inch	25,400 lbs

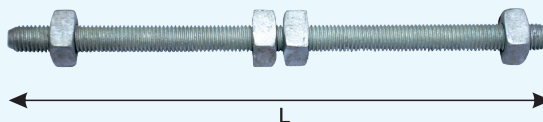

- DA bolts are rolled threads and manufactured in accordance with ANSI standards.
- Furnished with 4 square nuts and HDG as per ASTM A153

Catalog#	Bolt Length (inches) (L)	Approx. Ship Wt. (lb Per 100 Pc)	Std. Pkg. Qty.
5/8 Inch Diameter			
P 8860	10	130	50
P 8862	12	136	25
P 8864	14	154	25
P 8866	16	176	25
P 8868	18	192	25
P 8870	20	204	25
P 8872	22	223	25
P 8874	24	232	25
P 8876	26	240	25
P 8877	28	256	20
P 8878	30	264	20
P 8879	32	284	20
3/4 Inch Diameter			
P 8882	12	206	25
P 8884	14	228	25
P 8886	16	244	25
P 8888	18	268	25
P 8890	20	280	25
P 8892	22	308	25
P 8894	24	336	25
P 8896	26	345	25
P 8897	28	365	20
P 8898	30	385	20
P 8899	32	400	20
7/8 Inch Diameter			
P9112	12	283	20
P9114	14	312	20
P9116	16	341	20
P9118	18	370	15
P9120	20	398	15
P9122	22	427	15
P9124	24	456	15
P9126	26	485	10
P9128	28	514	10
P9130	30	543	10
P9132	32	572	10

• Custom Length Sizes Available Upon Request

RUS ACCEPTED

06

POWERLINE HARDWARE

6841 Phillips Parkway Drive S, Jacksonville, Florida 32256
 Phone : 904-288-9880, Fax : 904-268-9717

E-mail : sales@powerlinehardware.com | Website : www.powerlinehardware.com

