


Guy Clamps

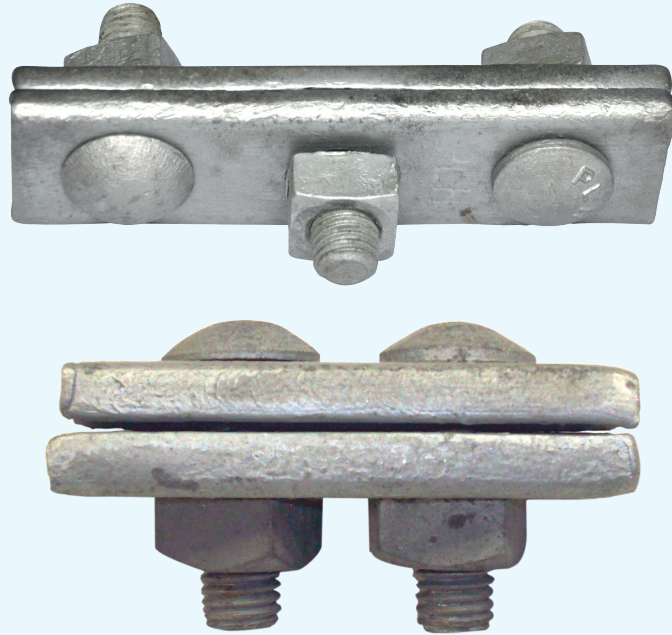

- Guy Clamps are rolled from carbon steels with straight parallel grooves which will not damage conductor strand
- Clamps come complete with bolts which have enough grip to prevent rotation during tightening
- Meets Bell Telephone Requirement of 18,000 lb
- HDG as per ASTM A153

Catalog #	No. Of Bolts	Bolt Diameter (inches)	Clamp Dimensions (inches)	Clamp width (inches)	Strand Diameter (inches)	Approx. Ship Wt. (lb Per 100 pcs)	Std. Pkg. Qty
P 1030	2	1/2	3 - 3/8	1 - 9/16	3/16 - 3/8	132	50
P 929	3	1/2	4	1 - 9/16	3/16 - 7/16	162	50
P 930	3	1/2	6	1 - 9/16	3-16 - 7/16	227	25
P 931	3	5/8	6	1 - 21/32	5/16 - 1/2	268	25

RUS ACCEPTED

Ground / Bond Clamp



Catalog	Mounting Bolt (Inches)	Wire Range (Inches)	Approx Ship Wt. (lb Per 100 pcs)	Std. Pkg. Qty
P1163	5/8	3/16-3/8	50	100
P1164	3/4	1/4-1/2	52	100

- HDG as per ASTM A 153



POWERLINE HARDWARE

6841 Phillips Parkway Drive S, Jacksonville, Florida 32256
 Phone : 904-288-9880, Fax : 904-268-9717
 E-mail : sales@powerlinehardware.com | Website : www.powerlinehardware.com