

# Hot Line Clamps




- Available in aluminum and copper alloy
- Clamps offer high strength and are impervious to corrosion
- Our Hot Line Clamps are also available in greased

### SPECIFICATIONS OF HOT LINE CLAMPS

Part No.	Connection type		Run			Tap		Length (inches)	Height (inches)	Width (inches)	Tap Nut (inches)	
	RUN	TAP	Dia (inches)	Max	Min	Dia (inches)	Max					min
P1520CC	CU	CU	.128-.414	2/0 STR	#8 SOL	.128-.414	2/0 STR	#8 SOL	4.5	1.25	2.75	9/16
P1520AGP	AL	AL/CU	.128-.414	2/0 STR	#8 SOL	.128-.414	2/0 STR	#8 SOL	4.5	1.25	2.75	9/16
P1530CC	CU	CU	.162-.745	400 MCM	#6 SOL	.152-.682	4/0 STR	#6 SOL	6.5	1.75	2.5	3/4
P1530AGP	AL	AL/CU	.162-.745	336.4MCM	#6 ACSR	.152-.682	4/0 STR	#6 SOL	6.5	1.75	2.5	3/4

RUS ACCEPTED

# Service Wedge Clamps

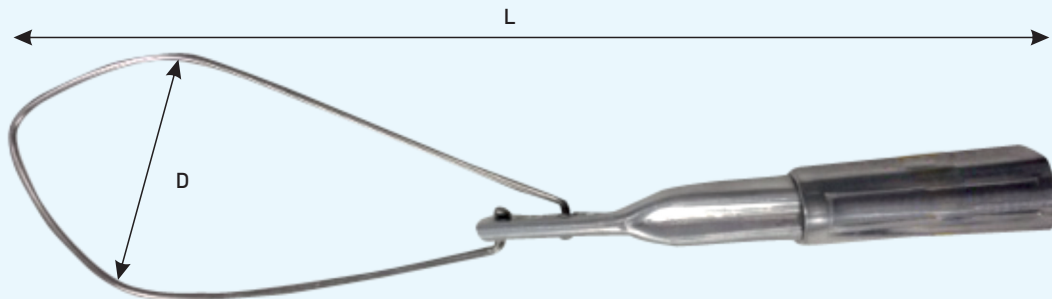

Catalog No.	Conductor Range			Dimensions (Inches)		Typical Tensile Values	
	ACSR	AL	AAAC	D	L	Conductor	Value Lbs.
PLH-62-1	2-6	1str.-6sol	2-6	2-3/8	12,17-1/2	2-6 X 1ACSR	1200 Lbs.
PLH-20-1	4-1/0	2sol.-2/0str.	4-1/0	2-3/8	12-1/2,18-1/2	1/0,6/1 ACSR	1800 Lbs.
PLH-40-1	2/0-4/0	2sol.-4/0str.	2/0-4/0	2-3/8	12-3/4,18-1/2	4/0,6/1 ACSR	1900 Lbs.



**POWERLINE HARDWARE**

6841 Phillips Parkway Drive S, Jacksonville, Florida 32256  
 Phone : 904-288-9880, Fax : 904-268-9717  
 E-mail : sales@powerlinehardware.com | Website : www.powerlinehardware.com