


Machine Bolts

Hot Dip Galvanized, Rolled Threads

Min. Tensile Strength	
3/8 Inch	4,250 lbs
1/2 Inch	7800 lbs
5/8 Inch	12,400 lbs
3/4 Inch	18,350 lbs
7/8 Inch	25,400 lbs

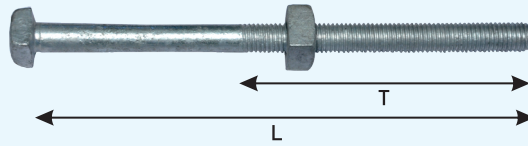

- Manufactured in accordance with ANSI standards C 135.1-1979
- Hot dip galvanized and are furnished with 1 sq nut

Catalog#	Bolt Length (inches) (L)	Thread Length (inches) (T)	Approx. Ship Wt. (lb Per 100 Pc)	Std. Pkg. Qty.
3/8 Inch Diameter				
P 8604-1/2	4-1/2	3	17	250
P8605	5	3	19	250
1/2 Inch Diameter				
P 8706	6	3	40	100
P 8707	7	4	45	100
P 8708	8	4	52	50
P 8710	10	6	61	50
P 8712	12	6	70	50
P 8714	14	6	79	50
P 8716	16	6	91	50
5/8 Inch Diameter				
P 8802	2	1-1/2	23	150
P 8805	5	3	57	50
P 8806	6	3	68	50
P 8807	7	4	72	50
P 8808	8	4	82	50
P 8809	9	4	82	50
P 8810	10	6	98	50
P 8812	12	6	112	50
P 8814	14	6	128	25
P 8816	16	6	146	25
P 8818	18	6	162	25
P 8820	20	6	170	25
P 8822	22	6	180	25
P 8824	24	6	220	25
P 8826	26	6	224	25
3/4 Inch Diameter				
P 8906	6	3	99	50
P 8908	8	4	124	50
P 8910	10	6	146	25
P 8912	12	6	170	25
P 8914	14	6	184	25
P 8916	16	6	212	25
P 8918	18	6	240	25
P 8920	20	6	262	25
P 8922	22	6	288	20
P 8924	24	6	296	20
P 8926	26	6	316	15
7/8 Inch Diameter				
P 9062	12	6	240	20
P 9064	14	6	264	15
P 9066	16	6	288	15
P 9068	18	6	320	15
P 9070	20	6	345	10
P 9072	22	6	380	10
P 9074	24	6	430	10

• Custom Length Sizes Available Upon Request

RUS ACCEPTED

Fasteners



POWERLINE HARDWARE

6841 Phillips Parkway Drive S, Jacksonville, Florida 32256
Phone : 904-288-9880, Fax : 904-268-9717

E-mail : sales@powerlinehardware.com | Website : www.powerlinehardware.com

05