

Spool Bolts

Min. Tensile Strength
5/8 Inch 13,550 lbs



- Spool bolts are furnished complete with two square nuts, locknut round washer and cotter pin.
- HDG as per ASTM A153.


Catalog #	Shank Length (inches)	Overall Length (inches)	Thread Length (inches)	Approx. Ship Wt. (lb Per 100 pcs)	Std. Pkg. Qty.
5/8 Inch Diameter - Single Upset					
P 2342 - 1/2	8	12 - 1/2	4	134	25
P 2343 - 1/2	9	13 - 1/2	4	150	25
P 2344 - 1/2	10	14 - 1/2	4	160	25
P 2346 - 1/2	12	16 - 1/2	6	180	25
P 2348 - 1/2	14	18 - 1/2	8	200	25
P 2350 - 1/2	16	20 - 1/2	8	206	25
5/8 Inch Diameter - Double Upset					
P 2394	8	14	4	160	25
P 2396	10	16	4	178	25
P 2398	12	18	6	196	25

- Custom Length Sizes Available Upon Request

Carriage Bolts

Hot Dip Galvanized, Rolled Threads

Min. Tensile Strength
3/8 Inch 4,250 lbs
1/2 Inch 7,800 lbs

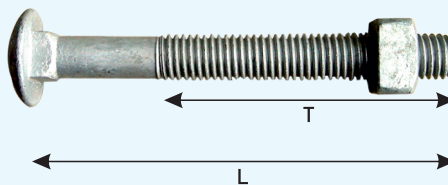

- Carriage bolts are rolled threads with square shoulder and one square nut.
- Square neck feature makes the bolt self locking by providing enough grip to prevent rotation.

Catalog#	Bolt Length (inches) (L)	Thread Length (inches) (T)	Approx. Ship Wt. (lb Per 100 Pc)	Std. Pkg. Qty.
3/8 Inch Diameter				
P 8634	4	3	16	250
P 8634 - 1/2	4 - 1/2	3	17	250
P 8635	5	3	20	250
P 8636	6	3	20	250
P 8638	8	3	24	100
1/2 Inch Diameter				
P 8644 1/2	4 - 1/2	3	32	200
P 8645	5	3	34	200
P 8646	6	3	41	200

- Custom Length Sizes Available Upon Request



POWERLINE HARDWARE

6841 Phillips Parkway Drive S, Jacksonville, Florida 32256
Phone : 904-288-9880, Fax : 904-268-9717
E-mail : sales@powerlinehardware.com | Website : www.powerlinehardware.com

09

Fasteners

Fasteners